# EPIPDC-COM-10A

Dual Battery Series 10A, 12/24V AUTO

Rating: Not Rated Yet
Ask a question about this product

Description

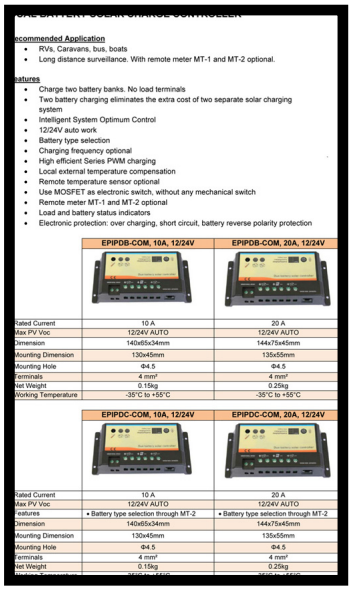

**ecommended Application**

- RVs, Caravans, bus, boats
- Long distance surveillance. With remote meter MT-1 and MT-2 optional.

**eatures**

- Charge two battery banks. No load terminals
- Two battery charging eliminates the extra cost of two separate solar charging system
- Intelligent System Optimum Control
- 12/24V auto work
- Battery type selection
- Charging frequency optional
- High efficient Series PWM charging
- Local external temperature compensation
- Remote temperature sensor optional
- Use MOSFET as electronic switch, without any mechanical switch
- Remote meter MT-1 and MT-2 optional
- Load and battery status indicators
- Electronic protection: over charging, short circuit, battery reverse polarity protection

| | EPIPDB-COM, 10A, 12/24V | EPIPDB-COM, 20A, 12/24V |
|---|---|---|
| Rated Current | 10 A | 20 A |
| Max PV Voc | 12/24V AUTO | 12/24V AUTO |
| Dimension | 140x65x34mm | 144x75x45mm |
| Mounting Dimension | 130x45mm | 135x55mm |
| Mounting Hole | Φ4.5 | Φ4.5 |
| Terminals | 4 mm² | 4 mm² |
| Net Weight | 0.15kg | 0.25kg |
| Working Temperature | -35°C to +55°C | -35°C to +55°C |

| | EPIPDC-COM, 10A, 12/24V | EPIPDC-COM, 20A, 12/24V |
|---|---|---|
| Rated Current | 10 A | 20 A |
| Max PV Voc | 12/24V AUTO | 12/24V AUTO |
| Features | • Battery type selection through MT-2 | • Battery type selection through MT-2 |
| Dimension | 140x65x34mm | 144x75x45mm |
| Mounting Dimension | 130x45mm | 135x55mm |
| Mounting Hole | Φ4.5 | Φ4.5 |
| Terminals | 4 mm² | 4 mm² |
| Net Weight | 0.15kg | 0.25kg |