


# SSL2-110

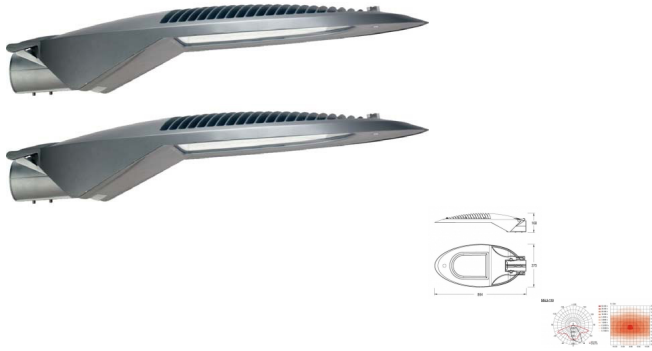

Street Light 110W

Rating: Not Rated Yet  
[Ask a question about this product](#)

## Description

### FEATURES

- New Light Design, simple and fashioned design with 4 different color for body (optional)
- Dip-coating aluminum housing
- Weather resistance surface, enhanced with anti-corrosive treatments
- One button press to open housing for easy maintenance
- CREE LEDs (upcoming model)
- Highest Quality
- Highest Luminous 110 to 130 lm/W

	SSL2-30	SSL2-40	SSL2-60	SSL2-90	SSL2-110	SSL2-120
LED Quantity	30 pcs	40 pcs	60 pcs	90 pcs	110 pcs	120 pcs
Rated Power	30 W	40 W	60 W	90 W	110 W	120 W
Rated Voltage	100-277 VAC	100-277 VAC	100-277 VAC	100-277 VAC	100-277 VAC	100-277 VAC
Frequency Range	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Color	<15%	<15%	<15%	<15%	<15%	<15%
Color Rendering Index	>80Ra	>80Ra	>80Ra	>80Ra	>80Ra	>80Ra
Efficiency (lm/W)	80-100	80-100	80-100	80-100	80-100	80-100
Light Lifetime (L70, L80)	25000/30000 Hours	25000/30000 Hours	25000/30000 Hours	25000/30000 Hours	25000/30000 Hours	25000/30000 Hours
Beam of Working Condition	-25° to 30°	-25° to 30°	-25° to 30°	-25° to 30°	-25° to 30°	-25° to 30°
Angle of Working Condition	10° to 30°	10° to 30°	10° to 30°	10° to 30°	10° to 30°	10° to 30°
Lifetime	>50,000 Hours	>50,000 Hours	>50,000 Hours	>50,000 Hours	>50,000 Hours	>50,000 Hours
Warranty	2 years	2 years	2 years	2 years	2 years	2 years
Protection Grade	IP65	IP65	IP65	IP65	IP65	IP65
W Case	ALU	ALU	ALU	ALU	ALU	ALU
Installation Pipe Diameter	64mm-80mm	64mm-80mm	64mm-80mm	64mm-80mm	64mm-80mm	64mm-80mm
Installation Height	4.0m	4.5m	6.0m	8.5m	11.0m	13.0m
Lamp Weight (kg)	2.5	3.5	5	7.5	11	13
Carton Packing Size	35cm x 30cm x 18cm	35cm x 30cm x 18cm	35cm x 30cm x 18cm	35cm x 30cm x 18cm	35cm x 30cm x 18cm	35cm x 30cm x 18cm
Carton Weight (kg)	7	7	7	7	7	7
Carton Qty	CE/Box	CE/Box	CE/Box	CE/Box	CE/Box	CE/Box