


# SSL2-120

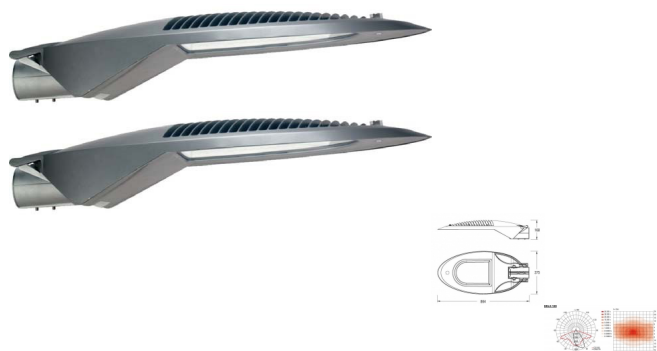

Street Light 120W

Rating: Not Rated Yet  
[Ask a question about this product](#)

## Description

### FEATURES

- New Light Design, simple and fashioned design with 4 different color for body (optional)
- Die-casting aluminum housing
- Weather resistance surface, enhanced with anti-corrosive treatments
- One button press to open housing for easy maintenance
- CREE LEDs (upcoming model)
- Highest Quality
- Highest Luminous 110 to 130 lm/W

	SSL2-20	SSL2-40	SSL2-60	SSL2-80	SSL2-110	SSL2-130
LED Quantity	24 pcs	24 pcs	24 pcs	24 pcs	24 pcs	24 pcs
Rated Power	20 W	40 W	60 W	80 W	110 W	130 W
Input Voltage	100-277 VAC	100-277 VAC	100-277 VAC	100-277 VAC	100-277 VAC	100-277 VAC
Frequency Range	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Efficiency	< 10%	< 10%	< 10%	< 10%	< 10%	< 10%
Color Temperature(Kelvin)	6000K/6500K/5000K	6000K/6500K/5000K	6000K/6500K/5000K	6000K/6500K/5000K	6000K/6500K/5000K	6000K/6500K/5000K
Color Rendering Index	> 90Ra	> 90Ra	> 90Ra	> 90Ra	> 90Ra	> 90Ra
Efficiency(lm/W)	80 lm/W	80 lm/W	80 lm/W	80 lm/W	80 lm/W	80 lm/W
Lamp Lifetime (L70, L80)	25000/30000/35000h	30000/35000/40000h	35000/40000/45000h	40000/45000/50000h	45000/50000/55000h	50000/55000/60000h
Temp. of Working Condition	-20° to 50°	-20° to 50°	-20° to 50°	-20° to 50°	-20° to 50°	-20° to 50°
Temp. of Working Condition	-20° to 50°	-20° to 50°	-20° to 50°	-20° to 50°	-20° to 50°	-20° to 50°
LifeSpan	>50,000 hours	>50,000 hours	>50,000 hours	>50,000 hours	>50,000 hours	>50,000 hours
Warranty	3 years	3 years	3 years	3 years	3 years	3 years
Protection Grade	IP65	IP65	IP65	IP65	IP65	IP65
IP Class	IP65	IP65	IP65	IP65	IP65	IP65
Installation Pipe Diameter	64mm-80mm	64mm-80mm	64mm-80mm	64mm-80mm	64mm-80mm	64mm-80mm
Installation Height	4.0m	4.5m	5.0m	5.5m	6.0m	6.5m
Lamp Weight (kg)	0.5	0.5	0.5	0.5	0.5	0.5
Carton Packing Size	20cm x 20cm x 18cm	20cm x 20cm x 18cm	20cm x 20cm x 18cm	20cm x 20cm x 18cm	20cm x 20cm x 18cm	20cm x 20cm x 18cm
Gross Weight (kg)	2	2	2	2	2	2
Carton	CE/Black	CE/Black	CE/Black	CE/Black	CE/Black	CE/Black