


SSL2-30

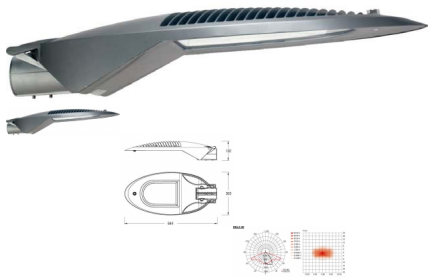

Street Light 30W

Rating: Not Rated Yet

[Ask a question about this product](#)

Description

FEATURES

- New Light Design, simple and fashioned design with 4 different color for body (optional)
- Die-casting aluminum housing
- Weather resistance surface, enhanced with anti-corrosive treatments
- One button press to open housing for easy maintenance
- CREE LEDs (upcoming model)
- Highest Quality
- Highest Luminous 110 to 130 lm/W

	SSL2-30	SSL2-40	SSL2-60	SSL2-90	SSL2-110	SSL2-130
LED Quantity	24 pcs	32 pcs	48 pcs	80 pcs	96 pcs	112 pcs
Beam Power	24 W	32 W	48 W	80 W	96 W	112 W
Beam Angle	100°/170° MAC	100°/170° MAC	100°/170° MAC	100°/170° MAC	100°/170° MAC	100°/170° MAC
Frequency Range	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
RF	± 15%	± 15%	± 15%	± 15%	± 15%	± 15%
Color	8000K/6500K/5000K	6500K/4500K/3000K	6500K/4500K/3000K	6500K/4500K/3000K	6500K/4500K/3000K	6500K/4500K/3000K
Color Rendering Index	>90Ra	>90Ra	>90Ra	>90Ra	>90Ra	>90Ra
Efficiency	80lm/W	80lm/W	80lm/W	80lm/W	80lm/W	80lm/W
Lamp Luminous Flux (lm)	2880/2016/1440/1008	3264/2304/1632	4608/3264/2304	7360/5184/3648	8640/6144/4320	10080/7168/5040
Typical Working Condition	-25° to 55°	-25° to 55°	-25° to 55°	-25° to 55°	-25° to 55°	-25° to 55°
Humidity Working Condition	10% to 90%	10% to 90%	10% to 90%	10% to 90%	10% to 90%	10% to 90%
Life span	50,000 hours	50,000 hours	50,000 hours	50,000 hours	50,000 hours	50,000 hours
Warranty	3 years	3 years	3 years	3 years	3 years	3 years
Protection Grade	IP65	IP65	IP65	IP65	IP65	IP65
IC Grade	IC10	IC10	IC10	IC10	IC10	IC10
Installation Type	440mm/660mm	440mm/660mm	440mm/660mm	440mm/660mm	440mm/660mm	440mm/660mm
Installation Height	4.5m	5.7m	6.8m	8.1m	9.1m	10.1m
Lamp Mounting	1.5	1.5	1.5	1.5	1.5	1.5
Carton Packing Size	700mm x 300mm x 180mm	700mm x 300mm x 180mm	700mm x 300mm x 180mm	800mm x 400mm x 240mm	800mm x 400mm x 240mm	800mm x 400mm x 240mm
Carton Weight (kg)	7	7	7	10	10	10
Certificate	CE/RoHS	CE/RoHS	CE/RoHS	CE/RoHS	CE/RoHS	CE/RoHS