


SSL2-40

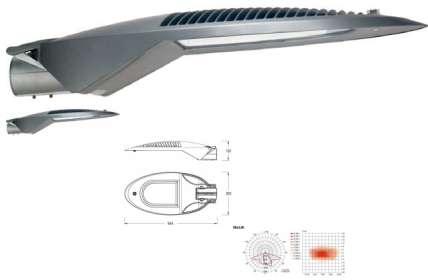

Street Light 40W

Rating: Not Rated Yet

[Ask a question about this product](#)

Description

FEATURES

- New Light Design, simple and fashioned design with 4 different color for body (optional)
- Die-casting aluminum housing
- Weather resistance surface, enhanced with anti-corrosive treatments
- One button press to open housing for easy maintenance
- CREE LEDs (supercoring model)
- Highest Quality
- Highest Luminous 110 to 130 lm/W

	SSL2-30	SSL2-40	SSL2-60	SSL2-90	SSL2-110	SSL2-130
LED Quantity	48 pcs	52 pcs	54 pcs	81 pcs	96 pcs	112 pcs
Rated Power	30 W	40 W	60 W	90 W	110 W	130 W
Beam Angle	105.2° (1/4)	105.2° (1/4)	105.2° (1/4)	105.2° (1/4)	105.2° (1/4)	105.2° (1/4)
Frequency Range	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Tag	1106	1106	1106	1106	1106	1106
Color	6000K/6000K/3000K	6000K/6000K/3000K	6000K/6000K/3000K	6000K/6000K/3000K	6000K/6000K/3000K	6000K/6000K/3000K
Color Rendering Index	>90Ra	>90Ra	>90Ra	>90Ra	>90Ra	>90Ra
Material	6061	6061	6061	6061	6061	6061
Lamp Luminous Flux (lm)	2800lm/220lm/1600lm	3200lm/250lm/2400lm	5300lm/400lm/4400lm	7800lm/730lm/6800lm	8400lm/680lm/7700lm	10000lm/1210lm/9000lm
Typical Working Condition	<25°C	<25°C	<25°C	<25°C	<25°C	<25°C
Heat Of Working Condition	10% to 90%	10% to 90%	10% to 90%	10% to 90%	10% to 90%	10% to 90%
Life span	>50,000 hours	>50,000 hours	>50,000 hours	>50,000 hours	>50,000 hours	>50,000 hours
Warranty	3 years	3 years	3 years	3 years	3 years	3 years
Protection Grade	IP65	IP65	IP65	IP65	IP65	IP65
K Grade	K10	K10	K10	K10	K10	K10
Installation Pipe Diameter	Φ40mm/Φ40mm	Φ40mm/Φ40mm	Φ40mm/Φ40mm	Φ40mm/Φ40mm	Φ40mm/Φ40mm	Φ40mm/Φ40mm
Installation Height	4.0m	5.2m	6.0m	6.5m	8.1m	10.2m
Lamp Mounting	1.0	1.0	1.0	1.0	1.0	1.0
Center Pointing Size	70mm x 30 mm x 18mm	70mm x 30 mm x 18mm	70mm x 30 mm x 18mm	82mm x 45 mm x 24mm	82mm x 45 mm x 24mm	82mm x 45 mm x 24mm
Driver Mounting	7	7	7	10	10	10
Certificate	CE/RoHS	CE/RoHS	CE/RoHS	CE/RoHS	CE/RoHS	CE/RoHS