


# SSL2-90

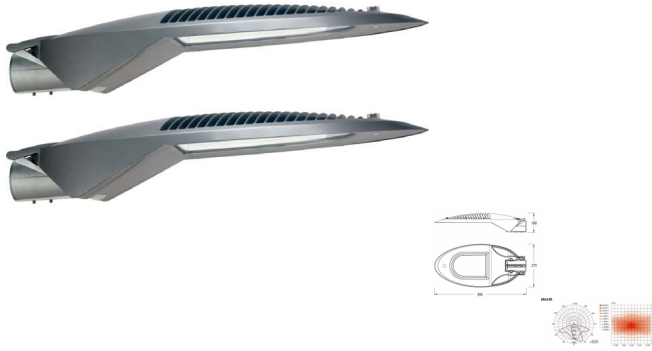

Street Light 90W

Rating: Not Rated Yet  
[Ask a question about this product](#)

## Description

### FEATURES

- New Light Design, simple and fashioned design with 4 different color for body (optional)
- Die-casting aluminum housing
- Weather resistance surface, enhanced with anti-corrosive treatments
- One button press to open housing for easy maintenance
- CREE LEDs (upcoming model)
- Highest Quality
- Highest Luminous 110 to 130 lm/W

	SSL2-30	SSL2-40	SSL2-60	SSL2-90	SSL2-110	SSL2-130
LED Quantity	30 pcs	40 pcs	60 pcs	90 pcs	110 pcs	130 pcs
Rated Power	30 W	40 W	60 W	90 W	110 W	130 W
Input Voltage	100-277 VAC	100-277 VAC	100-277 VAC	100-277 VAC	100-277 VAC	100-277 VAC
Frequency Range	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
THD	< 15%	< 15%	< 15%	< 15%	< 15%	< 15%
Color Temperature	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K	6500K/4000K/3000K
Color Rendering Index	> 90	> 90	> 90	> 90	> 90	> 90
Efficiency (lm/W)	80-100	80-100	80-100	80-100	80-100	80-100
Beam Spread (Beam Angle)	25° to 30°	30° to 35°	35° to 40°	40° to 45°	45° to 50°	50° to 55°
Temp. of Working Condition	-20° to 50°	-20° to 50°	-20° to 50°	-20° to 50°	-20° to 50°	-20° to 50°
Temp. of Storage Condition	-30° to 60°	-30° to 60°	-30° to 60°	-30° to 60°	-30° to 60°	-30° to 60°
Lifespan	> 100,000 Hours	> 100,000 Hours	> 100,000 Hours	> 100,000 Hours	> 100,000 Hours	> 100,000 Hours
Warranty	3 Years	3 Years	3 Years	3 Years	3 Years	3 Years
Protection Grade	IP65	IP65	IP65	IP65	IP65	IP65
IP Class	IP65	IP65	IP65	IP65	IP65	IP65
Installation Pipe Diameter	64mm-86mm	64mm-86mm	64mm-86mm	64mm-86mm	64mm-86mm	64mm-86mm
Installation Height	4.0m	4.5m	5.0m	5.5m	6.0m	6.5m
Lamp Weight (kg)	2.5	3.5	5.0	7.5	10.0	12.5
Carton Packing Size	35cm x 30cm x 18cm	35cm x 30cm x 18cm	35cm x 30cm x 18cm	35cm x 30cm x 18cm	35cm x 30cm x 18cm	35cm x 30cm x 18cm
Gross Weight (kg)	2	3	4	6	8	10
Carton Qty	100	100	100	100	100	100